

### **Galvanized Steel Wire Corners for Stucco and Plaster Installations**

Project Submittals as manufactured by  
ALABAMA METAL INDUSTRIES CORPORATION

Submittal Date:

Contract Number:

Project Name:

Section Number:

Contractor's Name:

---

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

**ALABAMA METAL INDUSTRIES CORPORATION**

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527  
email [fmayer@gibraltar1.com](mailto:fmayer@gibraltar1.com)

Á



## Lathing Accessories

### SCOPE

This submittal covers formed wire corner bead used as a corner reinforcement lathing accessories installed with interior and exterior Portland Cement-Based Plaster. The selection of the accessory shall be determined by numerous factors not limited to: the project location, climate and environment resulting from excessive salt, moisture, humidity, pollution, wear and temperature changes.

### MATERIALS

Galvanized Steel Wire

### THICKNESS OF BASE MATERIALS

These minimum thicknesses meet both ASTM C841 and ASTM C1063.

### FINISH

Galvanized Steel shall have G60 coating

### PACKAGING AND PACKAGE MARKING

Available in 8-ft and 9-ft long lengths. Longest possible lengths shall always be installed to avoid joints. Each factory box shall be marked with manufacturer's name, and style of lathing accessory.

### CERTIFICATION

When required a certification that products meets the requirements of ASTM C1063 and ASTM C841 shall be provided.

### AMICO LATH AND STUCCO ACCESSORIES MEETS THE FOLLOWING SPECIFICATIONS

ASTM A641 Standard Specification for Zinc-Coated (Galvanized) Carbon Steel Wire

ASTM C933 Standard Specification for Welded Wire Lath

ASTM C1063 Standard Specification for Installation of Lathing and Furring to Receive Interior and Exterior Portland Cement-Based Plaster

Conforms to requirements for stucco reinforcing as defined in the IBC & IRC

Made in the United States of America

Meets Buy American Procurement Requirements.

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

### ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527  
email [fmayer@gibraltar1.com](mailto:fmayer@gibraltar1.com)

Á



## GALVANIZED WIRE STRAIGHT CORNER BEADS

FOR STUCCO AND PLASTER INSTALLATIONS

Wire Corners allow a sharp plaster edge. They are manufactured from zinc coated wire mechanically shaped to form the corners. They are available in four types: Standard Straight, Arched, Bull Nose and Short Flange.

Product Submittal	Product Description	Ground Description
	Straight	2 1/2" x 2 1/2"
Standard Lengths are 8-Ft. and 9-Ft.		

### FINISH

The finish on all AMICO wire corner stucco accessories are compatible with standard lathing and paint finishes.

All butt joints, intersections, and ends should be joined, embedded and sealed in a quality sealant compatible with exterior paint finish.

### REFERENCES


Meets IBC 2510 and IBC 2511

Refer to ASTM C1063 for support spacing, lath selection, fastener selection and further information regarding the proper installation of metal lath and accessories.

Meets Buy American Procurement Requirements

Made in the United States of America

LEED: 100% post industrial recyclable content



All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

### ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527  
email [fmayer@gibraltar1.com](mailto:fmayer@gibraltar1.com)

Á



### GALVANIZED WIRE ARCH CORNER BEADS

FOR STUCCO AND PLASTER INSTALLATIONS

Wire Corners allow a sharp plaster edge. They are man- ufactured from zinc coated wire me- chanically shaped to form the corners. They are available in four types:

Standard Straight, Arched, Bull Nose and Short Flange.

Product Submittal	Product Description	Ground Description
	Arch	2 1/2" x 2 1/2"
Standard Lengths are 8-Ft. and 9-Ft.		

#### FINISH

The finish on all AMICO wire corner stucco acces- sories are compatible with standard lathing and

All butt joints, intersections, and ends should be joined, embedded and sealed in a quality sealant compatible with exterior paint finish.

#### REFERENCES


Meets IBC 2510 and IBC 2511

Refer to ASTM C1063 for support spacing, lath selection, fastener selection and further information regarding the proper installation of metal lath and acces- sories.

Meets Buy American Procurement Requirements

Made in the United States of America

LEED: 100% post industrial recyclable content

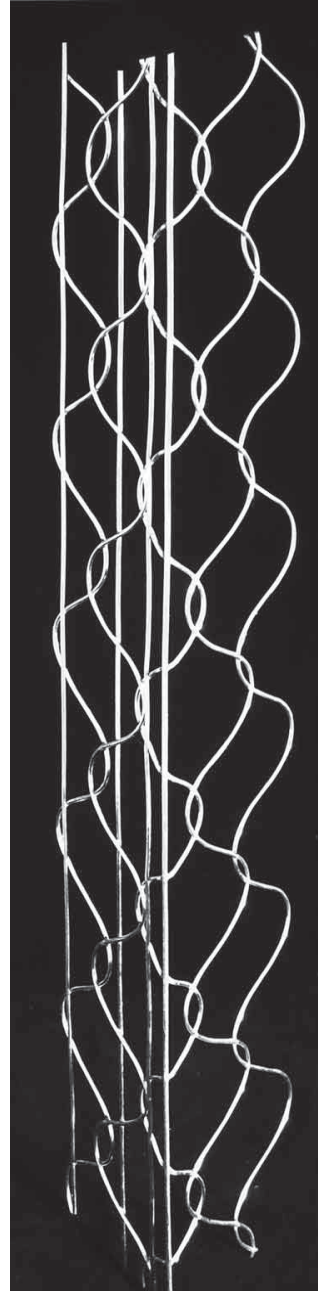

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

#### ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527

email [fmayer@gibraltar1.com](mailto:fmayer@gibraltar1.com)

À



## GALVANIZED WIRE BULL NOSE CORNER BEADS

FOR STUCCO AND PLASTER INSTALLATIONS

Wire Corners allow a sharp plaster edge. They are manufactured from zinc coated wire mechanically shaped to form the corners. They are available in four types: Standard Straight, Arched, Bull Nose and Short Flange.

Product Submittal	Product Description	Ground Description
	Bull Nose	2 1/2" x 2 1/2"
Standard Lengths are 8-Ft. and 9-Ft.		

### FINISH

The finish on all AMICO wire corner stucco accessories are compatible with standard lathing and




All butt joints, intersections, and ends should be joined, embedded and sealed in a quality sealant compatible with exterior paint finish.

### REFERENCES

Meets IBC 2510 and IBC 2511

Refer to ASTM C1063 for support spacing, lath selection, fastener selection and further information regarding the proper installation of metal lath and accessories.

Meets Buy American Procurement Requirements  
Made in the United States of America

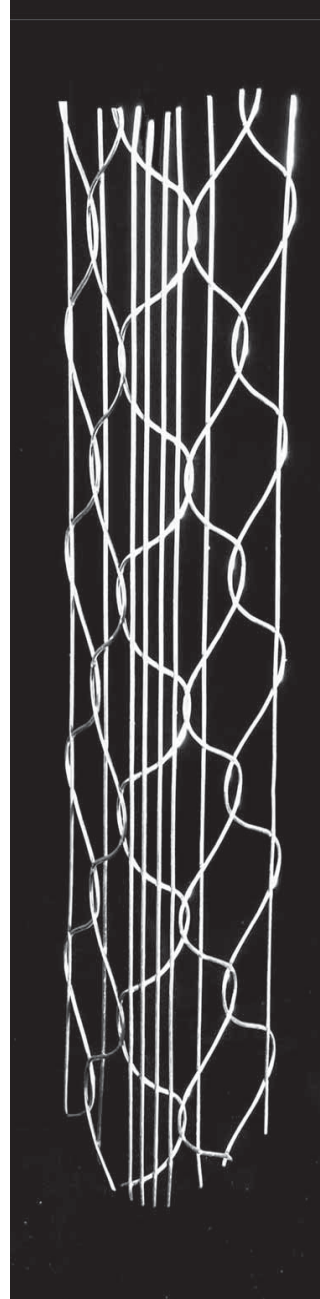

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

### ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527  
email [fmayer@gibraltar1.com](mailto:fmayer@gibraltar1.com)





### GALVANIZED WIRE SHORT FLANGE CORNER BEADS

FOR STUCCO AND PLASTER INSTALLATIONS

Wire Corners allow a sharp plaster edge. They are manufactured from zinc coated wire mechanically shaped to form the corners. They are available in four types:

Standard Straight, Arched, Bull Nose and Short Flange.

Product Submittal	Product Description	Ground Description
	Short Flange	2 1/2" x 1 1/2"
Standard Lengths are 8-Ft. and 9-Ft.		

#### FINISH

The finish on all AMICO wire corner stucco accessories are compatible with standard lathing and paint finishes.

All butt joints, intersections, and ends should be joined, embedded and sealed in a quality sealant compatible with exterior paint finish.

#### REFERENCES



Meets IBC 2510 and IBC 2511

Refer to ASTM C1063 for support spacing, lath selection, fastener selection and further information regarding the proper installation of metal lath and accessories.

Meets Buy American Procurement Requirements

Made in the United States of America

LEED: 100% post industrial recyclable content

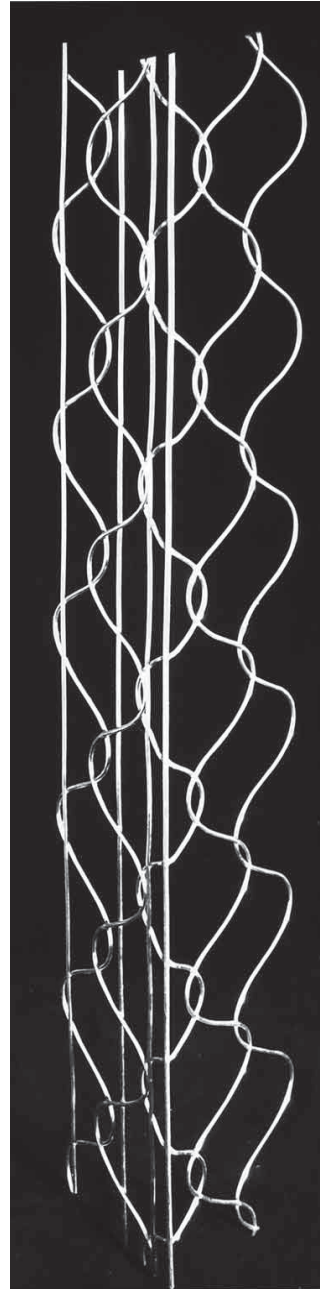

All information contained herein is accurate as known at the time of publication. Specifications may change and AMICO reserves the right to change product specifications without notice and without incurring obligations.

#### ALABAMA METAL INDUSTRIES CORPORATION

3245 Fayette Avenue ♦ Birmingham, AL 35208 ♦ Telephone 800/366-2642 ♦ Facsimile 205/786-6527  
email [fmayer@gibraltar1.com](mailto:fmayer@gibraltar1.com)

